

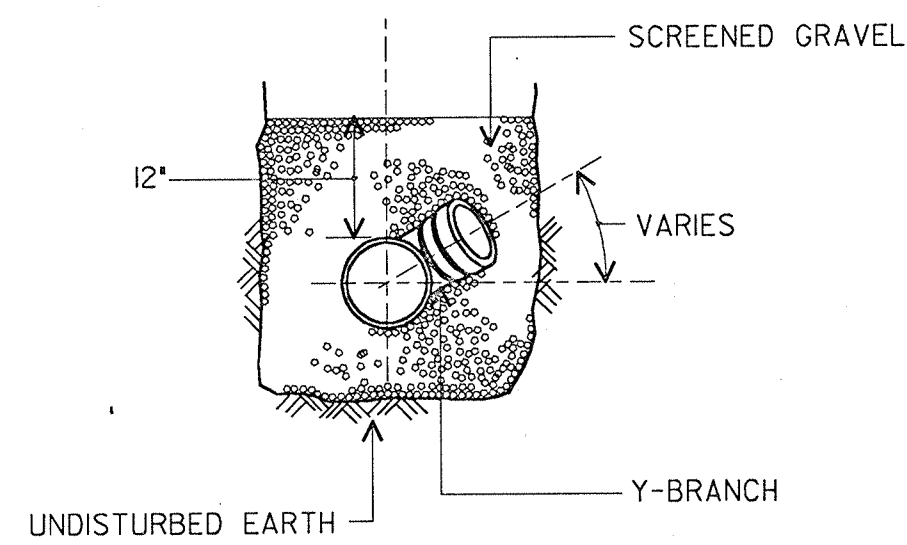
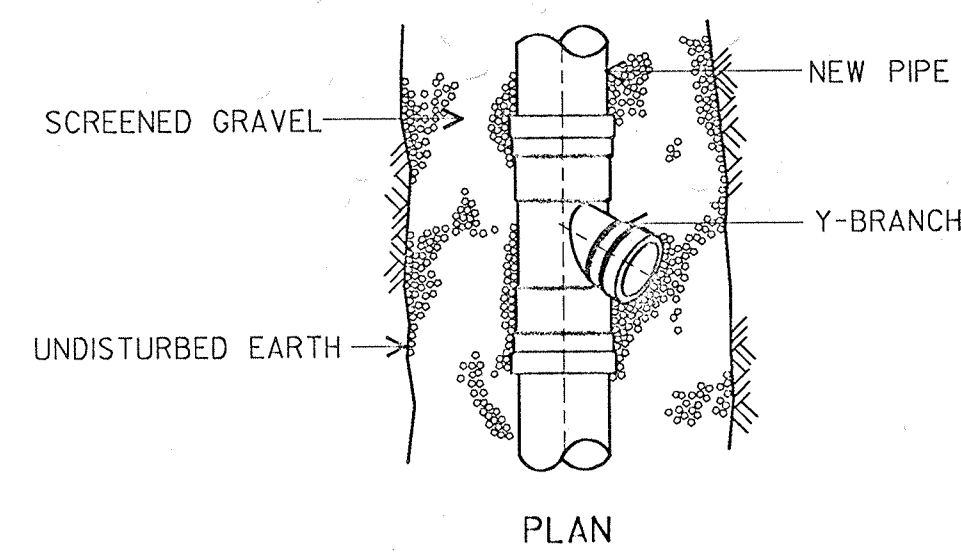


SERVICE CONNECTION DETAIL


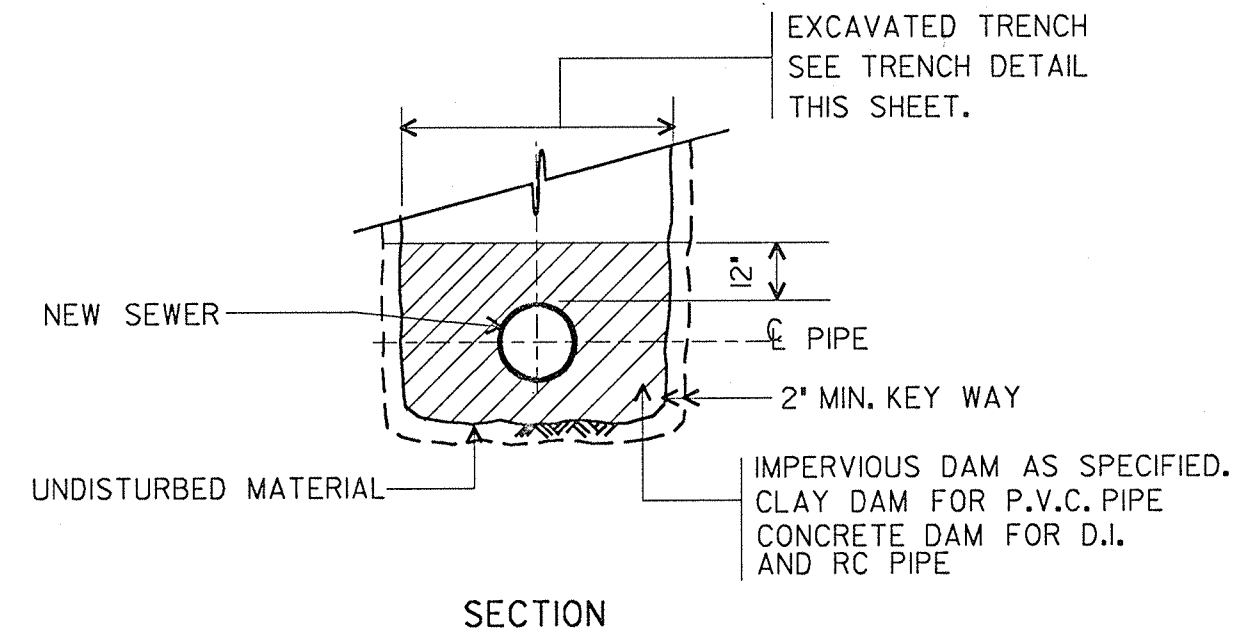


P.V.C. Y-BRANCH

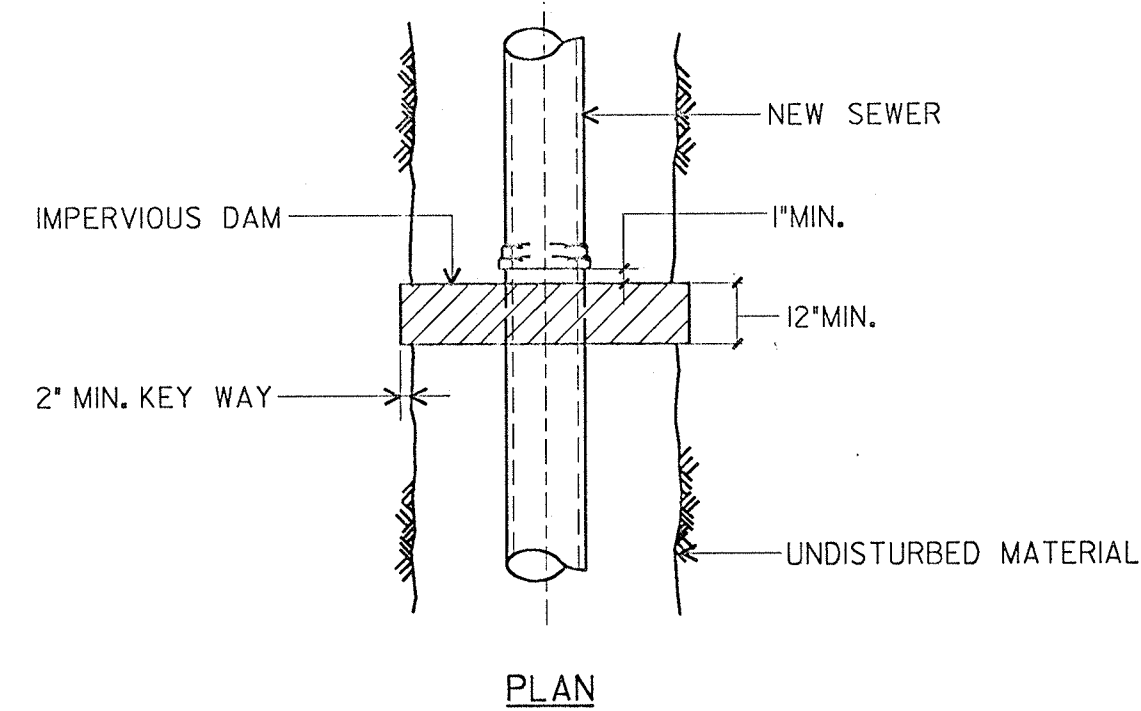


TYPICAL PIPE TRENCH DAM DETAIL - P.V.C. PIPE

NOTE: FOR PIPES OTHER THAN P.V.C. TOP OF DAM TO BE AT MID-DIAMETER OF PIPE

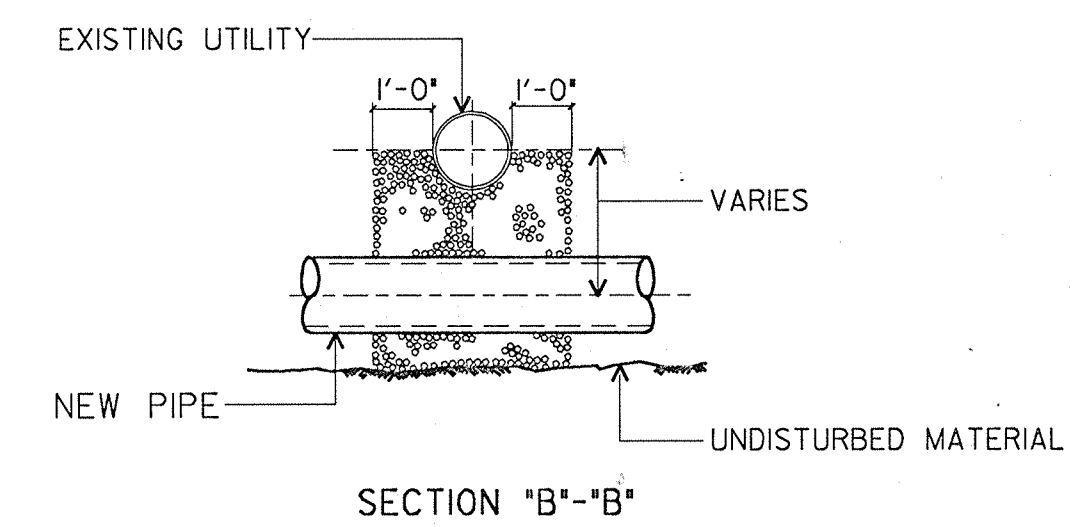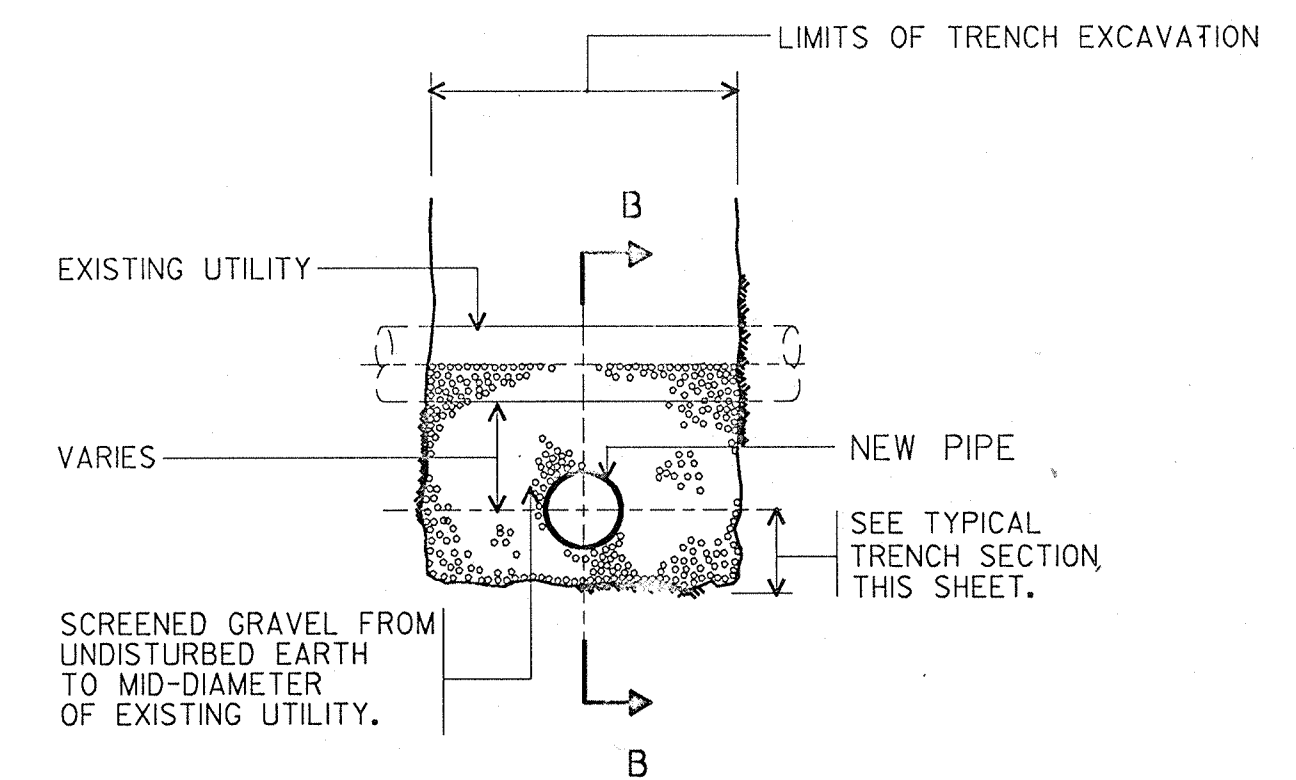

UTILITIES CROSSING DETAIL

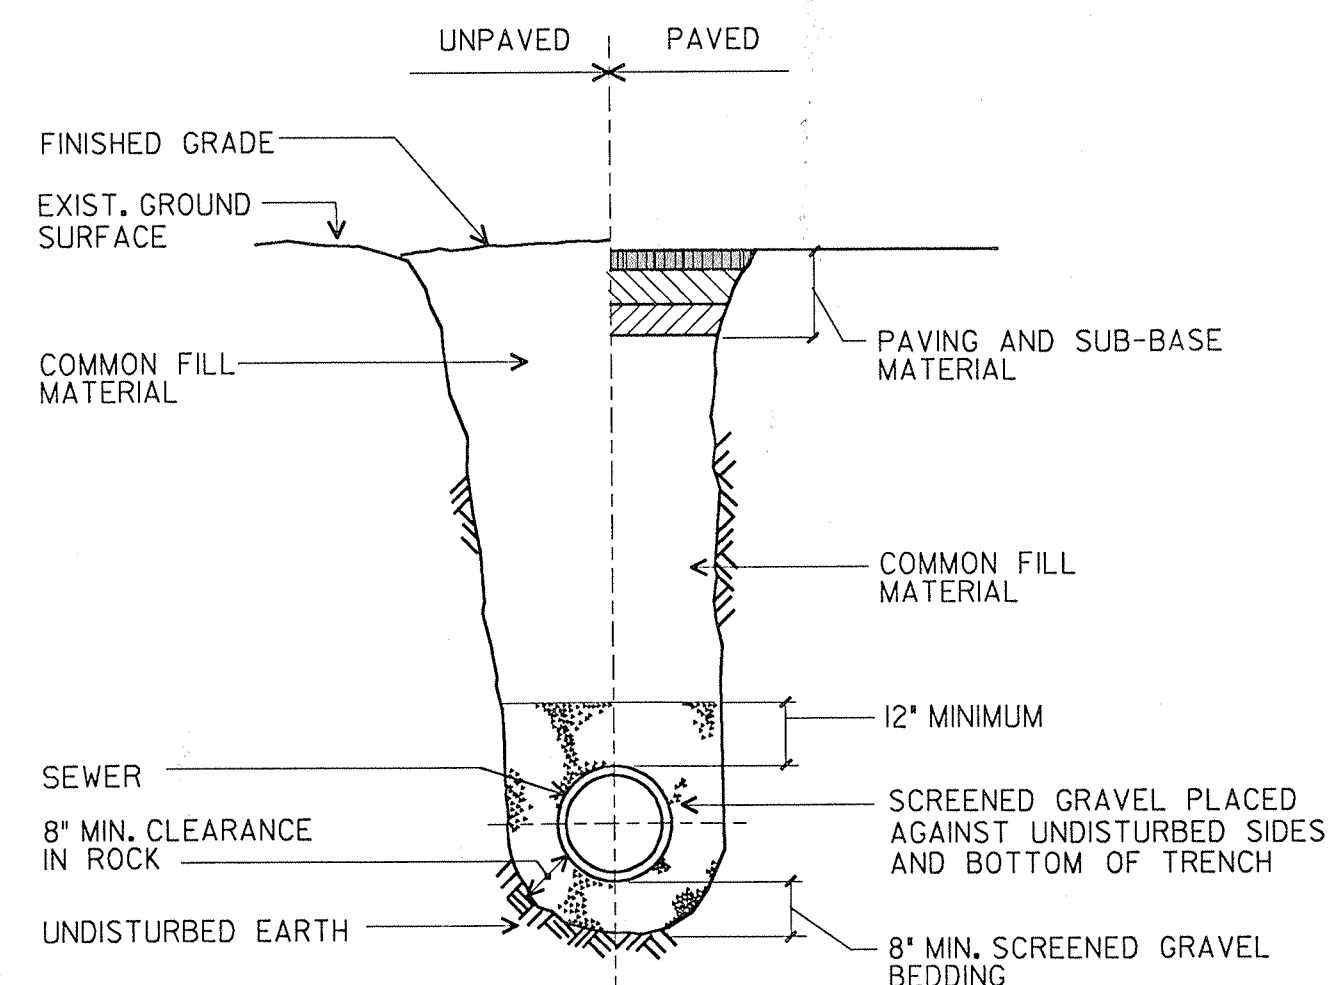

NOTES:

1. TRENCHES LOCATED ON THE ROAD SHOULDER SHALL BE TREATED THE SAME AS STREET EXCEPT FOR PAVING.
2. PROVIDE AT LEAST ONE IMPERVIOUS DAM IN GRAVEL BEDDING BETWEEN EACH MANHOLE OR EVERY 300 FT., WHICHEVER IS LESS. SEE DETAIL THIS SHEET.

